



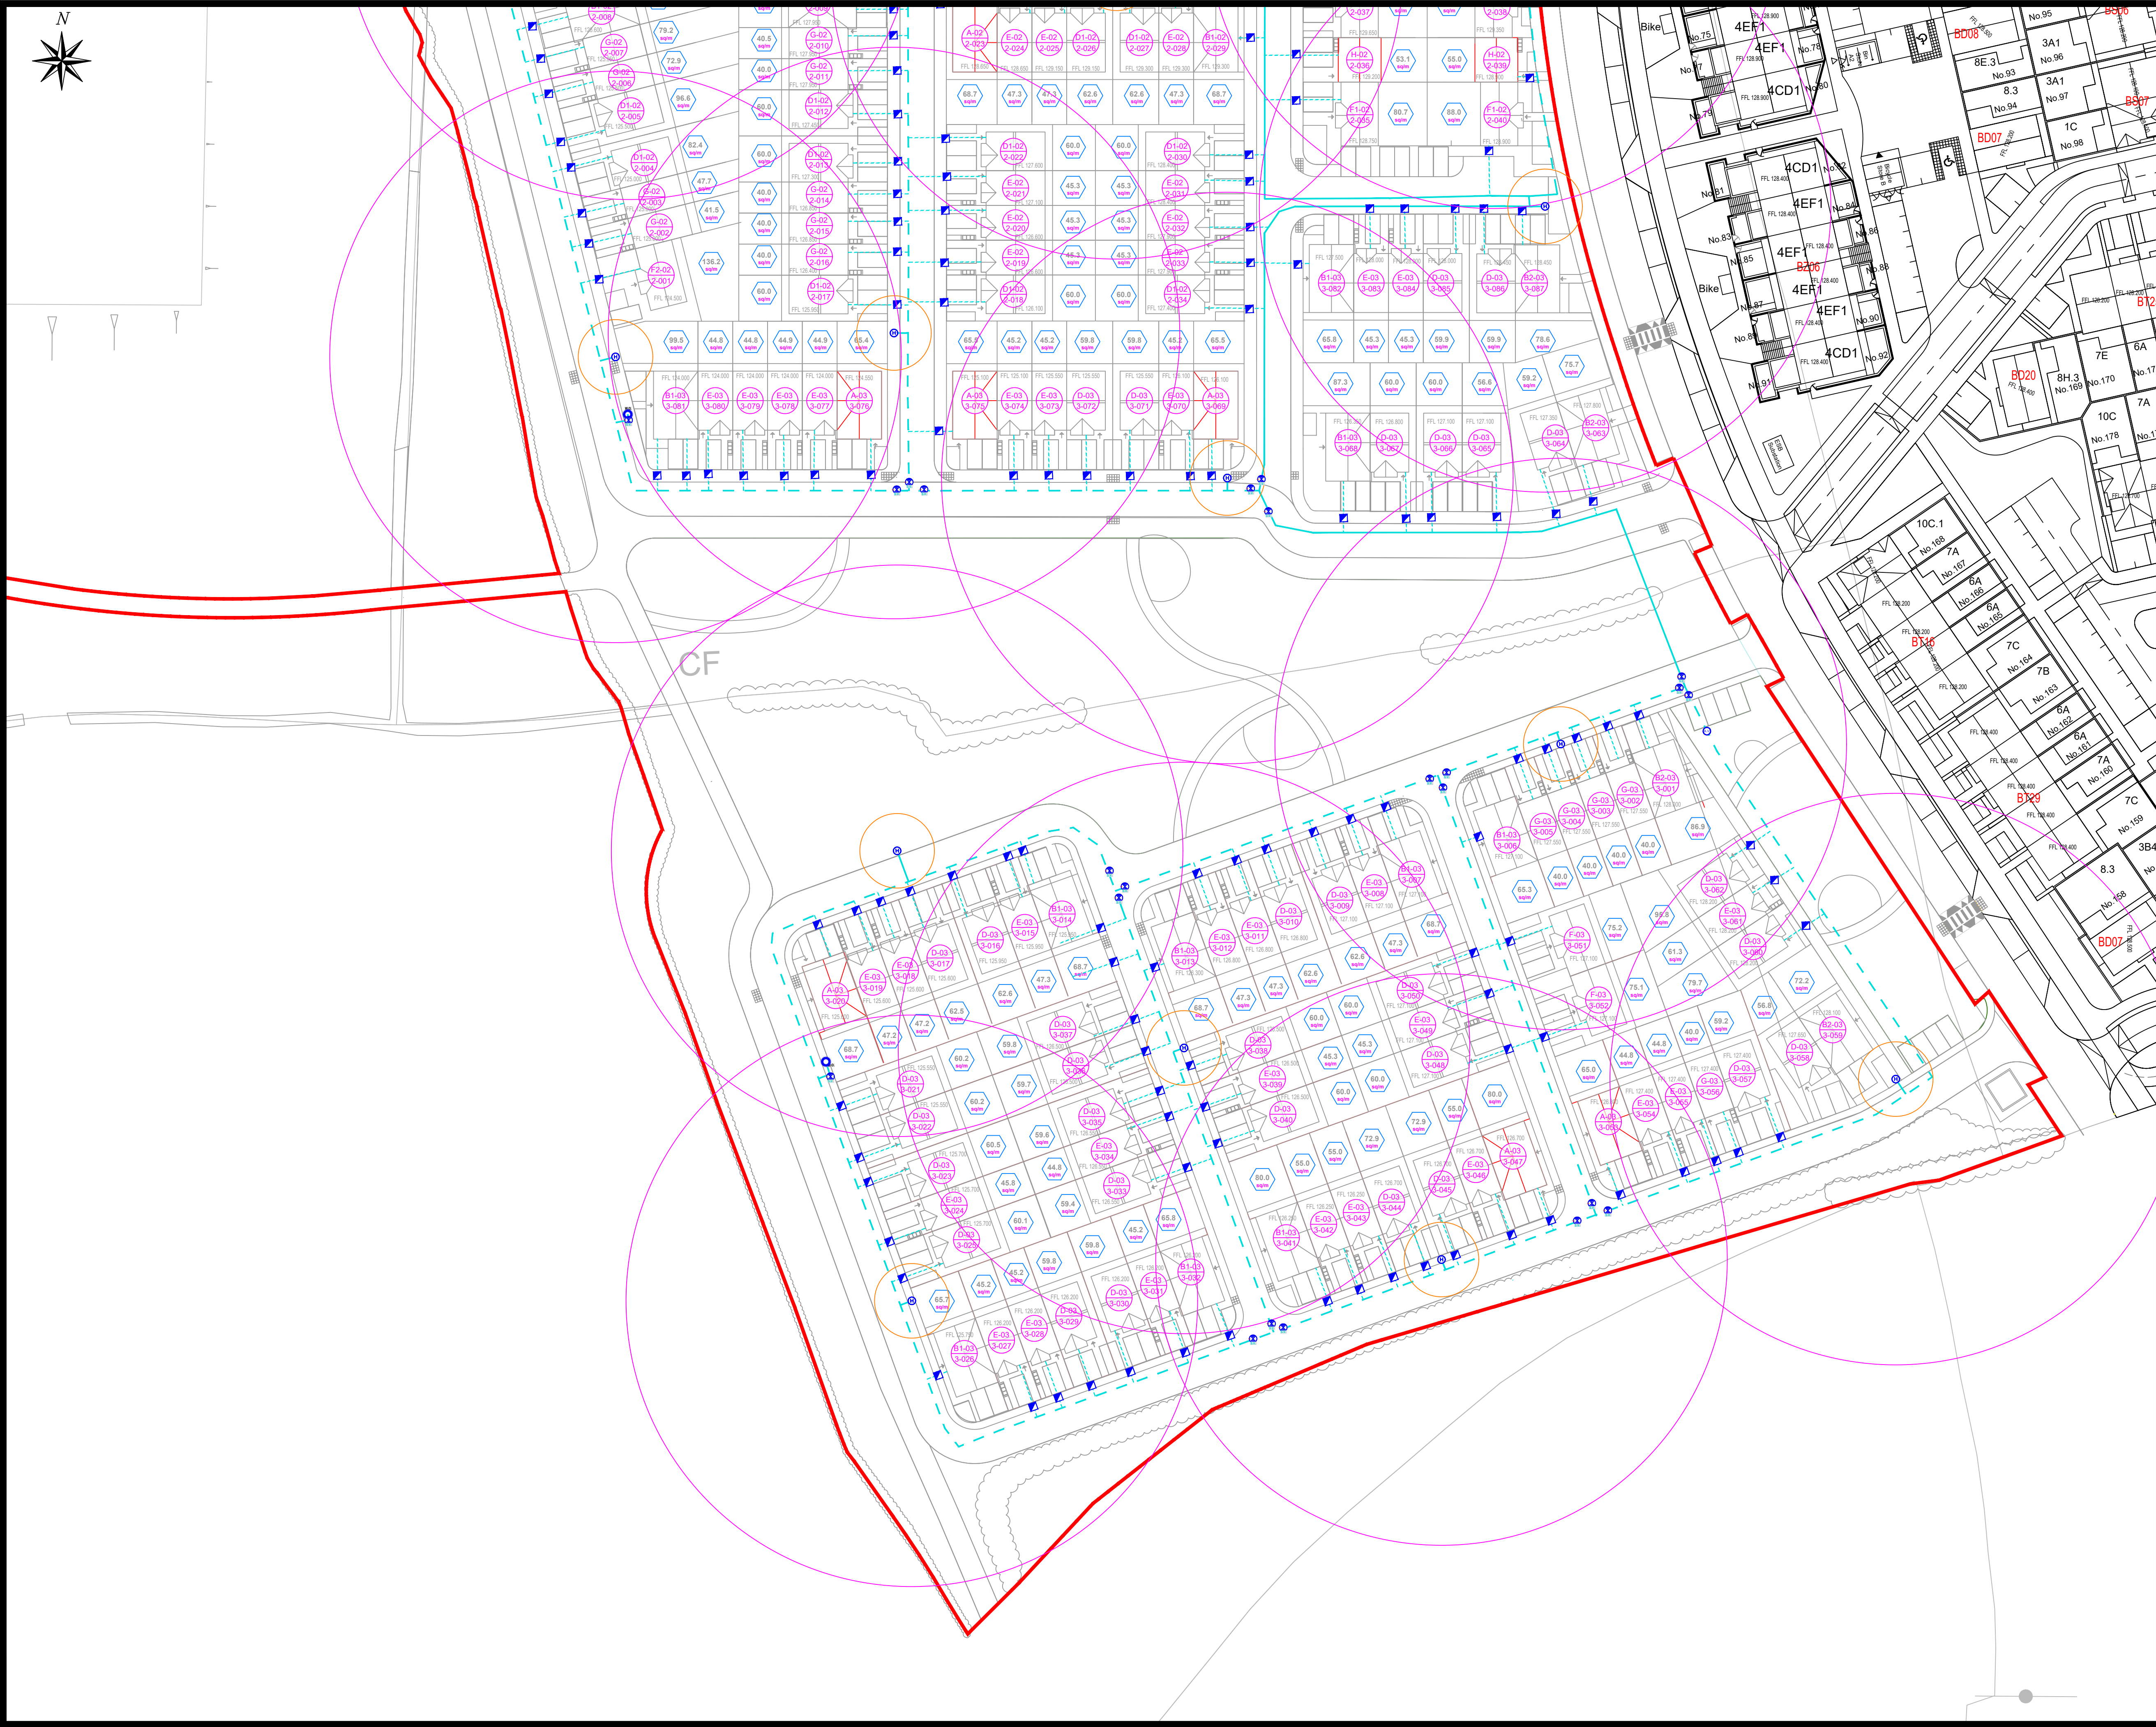

- Notes:**
- For any discrepancies found please consult with design office and refer to Uisce Éireann STD-W-13 for backfill and bedding detail.
 - Service layout distances to comply with Uisce Éireann Detail STD-W-11
 - Air valve and hydrants covers, where located in grass areas, shall be surrounded by a concrete plinth, 200mm all round and 100mm deep formed with C20/25 concrete, 20mm aggregate size, bedded in Clause 804 material. The plinth shall incorporate mild steel reinforcement links and shall have a bull-nose finish around its external perimeter. See Section 3.18 of Water Code of Practice for further details.
 - All pipe connection to units to be a minimum of 25mm O.D. in accordance to Irish Water Code of Practice Section 3.7
 - Watermain Loops to be constructed in accordance with Uisce Éireann standard detail drawing STD-W-39
 - All watermain infrastructure to be installed and built in accordance to Uisce Éireann Code of Practice and Standard Details.
- Legend:**
- Proposed Watermain (150mm Internal Ø HDPE)
 - Proposed Watermain (100mm Internal Ø HDPE)
 - Existing Watermain (200mm Internal Ø HDPE)
 - Proposed 25mm outer Ø PE-80 Water Connection to Private Property (Refer to STD-W-01 & STD-W-03 Uisce Éireann: Water Infrastructure Standard Details)
 - Proposed Boundary Box (Refer to STD-W-03 Uisce Éireann: Water Infrastructure Standard Details)
 - Proposed Bulk Meter w/ adjoining Kiosk (Refer to STD-W-26 Irish Water: Water Infrastructure Standard Details). For marker posts refer to STD-W-27 Irish Water: Water Infrastructure Standard Details.
 - Proposed Air Valve (Refer to STD-W-20 to STD-W-23 Uisce Éireann: Water Infrastructure Standard Details). For marker posts refer to STD-W-27 Uisce Éireann: Water Infrastructure Standard Details.
 - Proposed Sluice Valve (Refer to STD-W-04 to STD-W-10 & STD-W-14 to STD-W-15 Uisce Éireann: Water Infrastructure Standard Details). For marker posts refer to STD-W-27 Uisce Éireann: Water Infrastructure Standard Details.
 - Proposed Fire Hydrant (Refer to STD-W-16 to STD-W-19 Uisce Éireann: Water Infrastructure Standard Details). For marker posts refer to STD-W-27 Uisce Éireann: Water Infrastructure Standard Details.
 - Fire Hydrant Radius 46m
 - Fire Hydrant Radius 6m
 - Proposed Washout Hydrant (Refer to STD-W-30A Uisce Éireann: Water Infrastructure Standard Details). For marker posts refer to STD-W-27 Uisce Éireann: Water Infrastructure Standard Details.
 - Connection Point (Refer STD-W-05 Uisce Éireann: Water Infrastructure Standard Details)
 - Site Boundary

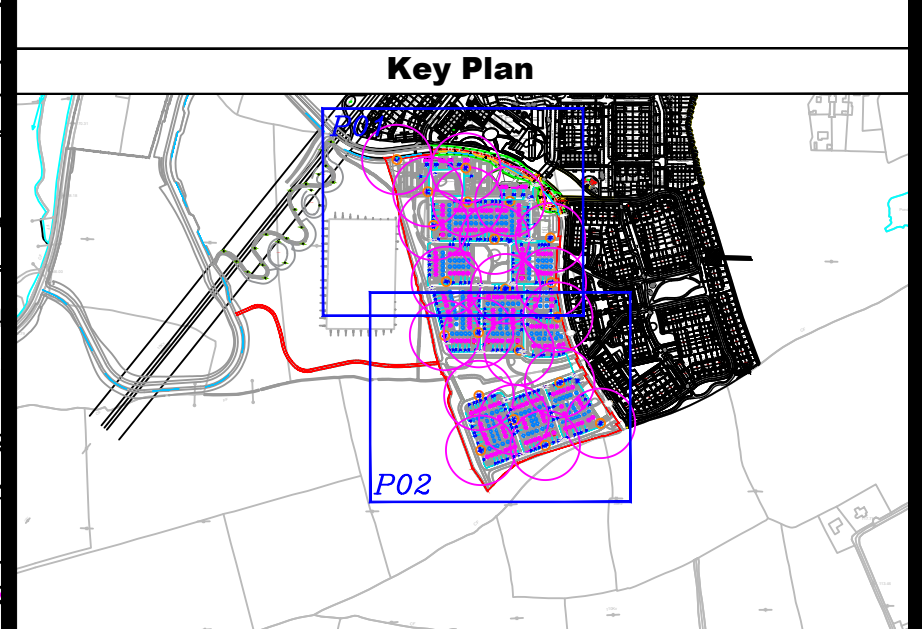

Rev	By	Date	Description

© Copyright
The information on this drawing is confidential and must not be disclosed to any third party or reproduced, in whole or part, without the express written consent of MHL & Associates Ltd. All drawings remain the property of MHL & Associates Ltd.
Includes Taite Éireann data reproduced under Licence number CYAL50352843.
Unauthorised reproduction infringes Taite Éireann and Government of Ireland copyright.
© National Mapping Division of Taite Éireann. All rights reserved.

Drawing Status: PLANNING
NOT FOR CONSTRUCTION

Project Title:
Longview Estates - Neighbourhood 7

Drawing Title:
Watermain Layout
Sheet 2 of 2



MHL & Associates Ltd.
Consulting Engineers
Unit 1B, The Atrium,
Blackpool,
Cork,
T23 T2VY
Tel: 021-4840214
Web: www.mhl.ie
E-Mail: info@mhl.ie

Designed: AO	Drawn: AO	Checked: KM
Scale: 1: 500 @ A1 1:1000 @ A3	Date: June 2026	
MHL Job No. 24083HD	Drawing No. 24083HD-WL7-P02	Revision. 00